
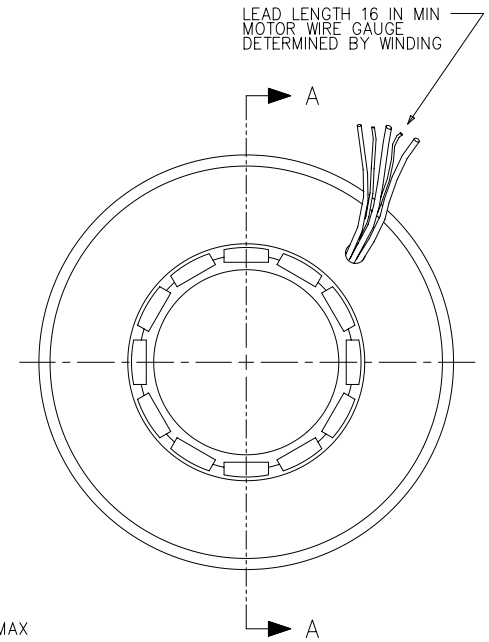


MODEL NUMBER	STACK LENGTH		ROTOR LENGTH	
	DIM. "A"	DIM. "B"	DIM. "A"	DIM. "B"
	in $\pm .025$ $\pm .010$	mm $\pm .64$ $\pm .25$	in $\pm .005$ $\pm .200$	mm $\pm .13$ $\pm .005$
B02.5-06	.250	6.35	.255	6.48
B02.5-13	.500	12.70	.505	12.83
B02.5-19	.750	19.05	.750	19.05

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

NOTES:




1. OFFSET SHOULD EQUAL $(B-A)/2 \pm .025$ in.
2. ROTOR SHOULD BE MOUNTED CONCENTRIC WITHIN .004 WITH RESPECT TO STATOR OD.
3. MOTOR DIMENSIONS SHOWN APPLY ONLY IN A MACHINING OR TEST FIXTURE AND NOT IN THE FREE OR UNRESTRAINED STATE.
4. DETAILS OF MOTOR SHOWN ARE GENERIC ACTUAL MOTOR MAY DIFFER IN APPEARANCE.
5. MOTOR ROTATION WILL BE IN THE CLOCKWISE DIRECTION AS VIEWED FROM THE LEAD SIDE WHEN ENERGIZED IN THE SEQUENCE WHITE-BLACK-RED.

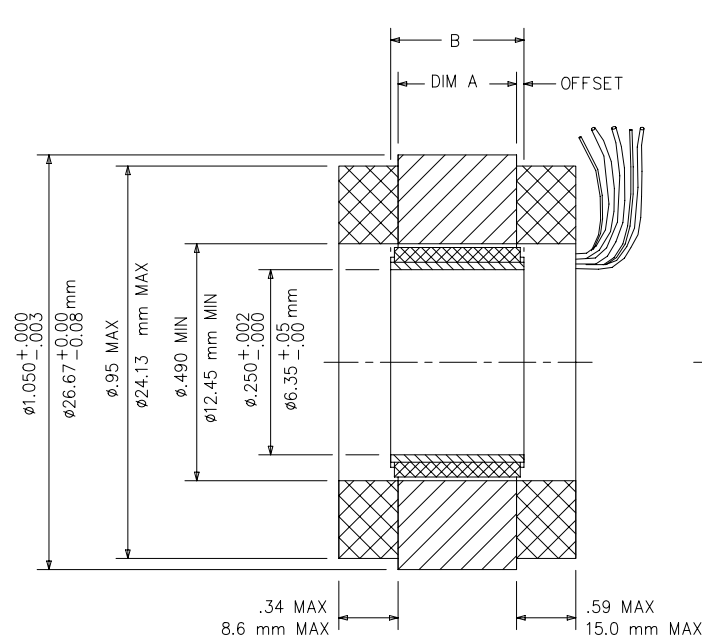

SECTION AA

LEAD SIDE

ONE THERMISTOR IS STANDARD



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ARE:		
FRACTIONS $\pm 1/64$	DECIMALS .XX = $\pm .01$.XXX = $\pm .005$	ANGLES $\pm 1^\circ$
MATERIAL	SIZE B	SCALE NONE
FINISH	DO NOT SCALE DRAWING	DWG NO. 2034034
CHKD DATE	EEB 8-11-05	DWG DATE: DC 8-11-05

MOTION CONTROL SYSTEMS, INC.
New River, Virginia 24129

FRAMELESS MOTOR PHYSICAL SPECIFICATION
B02.5-XXX VARNISHED .250 ID

REV. N/A	DWG NO. 2034034	SHEET 1 OF 1
----------	-----------------	--------------