


MODEL NUMBER	STACK LENGTH DI M. "A"		ROTOR LENGTH DI M. "B"	
	in. ± 0.015	mm ± 0.38	in. ± 0.005	mm ± 0.13
B20-13	0.500	12.70	0.505	12.83
B20-25	1.000	25.40	1.010	25.65
B20-38	1.500	38.10	1.515	38.48
B20-51	2.000	50.80	2.020	51.31
B20-64	2.500	63.50	2.525	64.14
B20-76	3.000	76.20	3.030	76.96
B20-89	3.500	88.90	3.535	89.79
B20-102	4.000	101.60	4.040	102.62
B20-114	4.500	114.30	4.545	115.44
B20-127	5.000	127.00	5.050	128.27
B20-140	5.500	139.70	5.555	141.10
B20-152	6.000	152.40	6.060	153.92
B20-165	6.500	165.10	6.565	166.75
B20-178	7.000	177.80	7.070	179.58
B20-191	7.500	190.50	7.575	192.41
B20-203	8.000	203.20	8.080	205.23
B20-216	8.500	215.90	8.585	218.06
B20-229	9.000	228.60	9.090	230.89
B20-241	9.500	241.30	9.595	243.71
B20-254	10.000	254.00	10.100	256.54

OFFSET SHOULD EQUAL $(B-A)/2 \pm 0.025$ IN.
 ROTOR SHOULD BE MOUNTED CONCENTRIC TO WITHIN 0.004 WITH RESPECT TO STATOR OD

MOTOR DIMENSIONS SHOWN APPLY ONLY IN A MACHINING OR TEST FIXTURE AND NOT IN THE FREE OR UNRESTRAINED STATE

DETAILS OF MOTOR SHOWN ARE GENERIC. ACTUAL MOTOR MAY DIFFER IN APPEARANCE

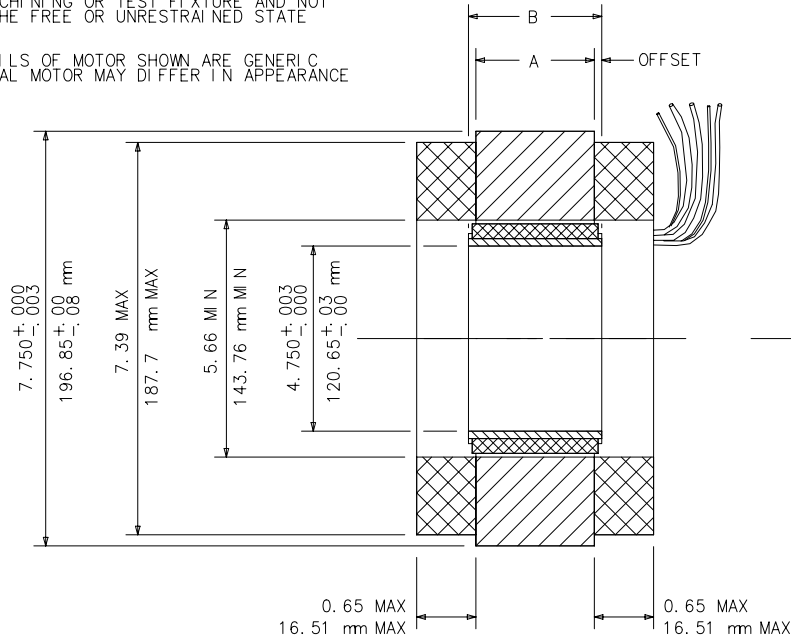


LEAD LENGTH 16 in MIN
 MOTOR WIRE GAUGE
 DETERMINED BY WINDING


SECTION AA

LEAD SIDE


ONE THERMISTOR IS STANDARD




WYE CONFIGURATION



DELTA CONFIGURATION



OPTIONAL 3 THERMISTOR CONFIG.



MOTOR ROTATION WILL BE IN THE CLOCKWISE DIRECTION AS VIEWED FROM THE LEAD SIDE WHEN ENERGIZED IN THE SEQUENCE WHITE-BLACK-RED

CONSULT FACTORY FOR SIX-LEAD CONFIGURATION

REV	DESCRIPTION	DATE	APPROVED
REVISIONS			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ARE:			
FRACTIONS R1/64	DECIMALS .XX = R.01 .XXX = R.005	ANGLES R1°	
MOTION CONTROL SYSTEMS, INC. Dublin, Virginia 24084			
FRAMELESS MOTOR PHYSICAL SPECIFICATION B20-XXX-16 VARNISHED WINDINGS (4.75 I.D.)			
MATERIAL	SIZE B	SCALE NONE	DWG NO. W2013124
FINISH	CHKD DATE: 4-7-95 EEB	DWG DATE: LDB 12-15-94	REV. SHEET 1 OF 1
DO NOT SCALE DRAWING			